

Model 0645 Plunger Style Trap

NOTE: Safety pin should be reinserted whenever un-sprung mole traps are removed from ground.


1. To identify active mole tunnels, flatten out all tunnels. Wait 24 hours. Tunnels that resurface are most likely the active tunnels. Set traps in these locations.




2. Make a depression in the roof of the main tunnel by pressing down with your thumb.



3. Center the trap on the tunnel, with the trap pan directly over the depression you've made with your thumb.

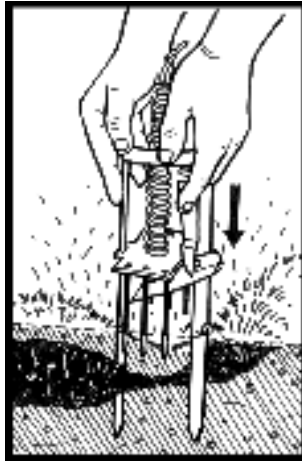


4. Push trap down until spears have bottomed out.

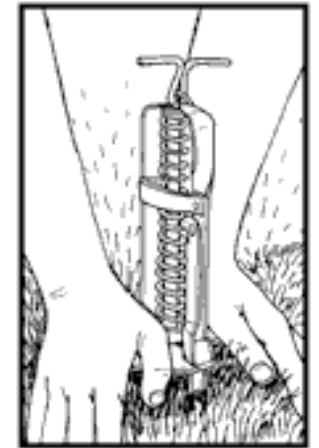

5. Preset spear holes by plunging spears up and down until they travel easily to the bottom on their own.


6. Before setting the trap, make sure the firing latch is OUTSIDE the pan.

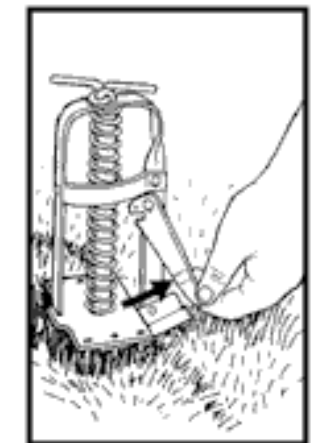

7. Holding the trap frame in place, rapidly pull upward on T handle until the firing latch snaps over the pan. Ease T handle down until latch catches.



8. Trap is set. If necessary, apply slight downward force to ensure pan is fitting IN the thumb depression and is contacting the roof of the tunnel.

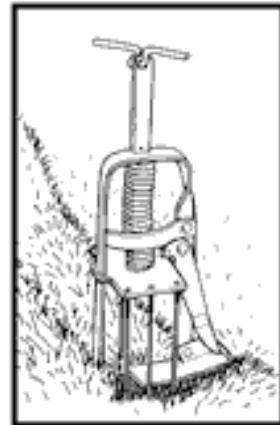

9. Trap has fired. Remove mole.